

2N3439  
2N3440

SILICON  
NPN TRANSISTOR



TO-39 CASE



www.centrasemi.com

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 2N3439 and 2N3440 are silicon NPN transistors designed for consumer and industrial line-operated applications.

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )

Collector-Base Voltage	
Collector-Emitter Voltage	
Emitter-Base Voltage	
Continuous Collector Current	
Continuous Base Current	
Power Dissipation	
Operating and Storage Junction Temperature	

SYMBOL	2N3439	2N3440	UNITS
$V_{CBO}$	450	300	V
$V_{CEO}$	350	250	V
$V_{EBO}$		7.0	V
$I_C$		1.0	A
$I_B$		0.5	A
$P_D$		1.0	W
$T_J, T_{stg}$		-65 to +200	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$I_{CBO}$	$V_{CB}=360\text{V}$ (2N3439)		20	$\mu\text{A}$
$I_{CBO}$	$V_{CB}=250\text{V}$ (2N3440)		20	$\mu\text{A}$
$I_{CEX}$	$V_{CE}=450\text{V}, V_{BE}=1.5\text{V}$ (2N3439)		500	$\mu\text{A}$
$I_{CEX}$	$V_{CE}=300\text{V}, V_{BE}=1.5\text{V}$ (2N3440)		500	$\mu\text{A}$
$I_{CEO}$	$V_{CE}=300\text{V}$ (2N3439)		20	$\mu\text{A}$
$I_{CEO}$	$V_{CE}=200\text{V}$ (2N3440)		50	$\mu\text{A}$
$I_{EBO}$	$V_{EB}=6.0\text{V}$		20	$\mu\text{A}$
$BV_{CEO}$	$I_C=50\text{mA}$ (2N3439)	350		V
$BV_{CEO}$	$I_C=50\text{mA}$ (2N3440)	250		V
$V_{CE(SAT)}$	$I_C=50\text{mA}, I_B=4.0\text{mA}$		0.5	V
$V_{BE(SAT)}$	$I_C=50\text{mA}, I_B=4.0\text{mA}$		1.3	V
$h_{FE}$	$V_{CE}=10\text{V}, I_C=2.0\text{mA}$ (2N3439)	30		
$h_{FE}$	$V_{CE}=10\text{V}, I_C=20\text{mA}$	40	160	
$f_T$	$V_{CE}=10\text{V}, I_C=10\text{mA}, f=5.0\text{MHz}$	15		MHz
$C_{ob}$	$V_{CB}=10\text{V}, I_E=0, f=1.0\text{MHz}$		10	pF
$C_{ib}$	$V_{EB}=5.0\text{V}, I_C=0, f=1.0\text{MHz}$		75	pF

R2 (25-November 2019)

2N3439  
2N3440  
  
SILICON  
NPN TRANSISTOR



TO-39 CASE - MECHANICAL OUTLINE

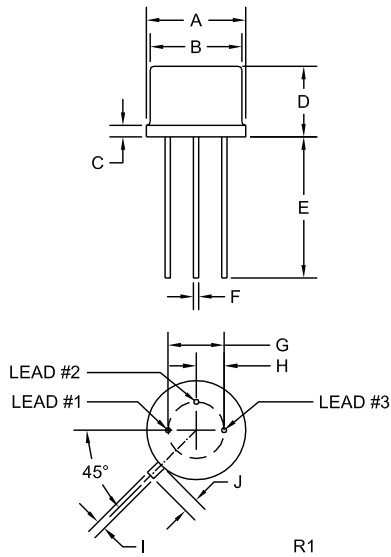

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.335	0.370	8.51	9.40
B (DIA)	0.315	0.335	8.00	8.51
C	-	0.040	-	1.02
D	0.240	0.260	6.10	6.60
E	0.500	-	12.70	-
F (DIA)	0.016	0.021	0.41	0.53
G (DIA)	0.200		5.08	
H	0.100		2.54	
I	0.028	0.034	0.71	0.86
J	0.029	0.045	0.74	1.14

TO-39 (REV: R1)

LEAD CODE:

- 1) Emitter
- 2) Base
- 3) Collector

MARKING: FULL PART NUMBER

R2 (25-November 2019)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)