

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild guestions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products for any particular purpose, nor does ON Semiconductor assume any liability to make changes without further notice to any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights or others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonab



NC7SV38

TinyLogic® ULP-A 2-Input NAND Gate (Open Drain Output)

General Description

The NC7SV38 is a single 2-Input NAND Gate with open drain output stage from Fairchild's Ultra Low Power-A (ULP-A) series of TinyLogic®. ULP-A is ideal for applications that require extreme high speed, high drive and low power. This product is designed for a wide low voltage operating range (0.9V to 3.6V V_{CC}) and applications that require more drive and speed than the TinyLogic ULP series, but still offer best in class low power operation.

The NC7SV38 is uniquely designed for optimized power and speed, and is fabricated with an advanced CMOS technology to achieve high-speed operation while maintaining low CMOS power dissipation.

Features

- 0.9V to 3.6V V_{CC} supply operation
- 3.6V overvoltage tolerant I/O's at V_{CC} from 0.9V to 3.6V

August 2002

Revised March 2004


- Extremely High Speed t_{PD}
 - 1.0 ns typ for 2.7V to 3.6V $V_{\rm CC}$
 - 1.2 ns typ for 2.3V to 2.7V V_{CC}
 - 2.0 ns typ for 1.65V to 1.95V $\rm V_{\rm CC}$
 - 3.2 ns typ for 1.4V to 1.6V $V_{\rm CC}$
 - 6.0 ns typ for 1.1V to 1.3V $\rm V_{\rm CC}$
 - 13.0 ns typ for 0.9V $V_{\rm CC}$
- Power-Off high impedance inputs and outputs
- High Static Drive (I_{OH}/I_{OL})
 - ± 24 mA $\,$ @ 3.00V $\rm V_{CC}$
 - ± 18 mA @ 2.30V V_{CC}
 - ±6 mA @ 1.65V V_{CC} ±4 mA @ 1.4V V_{CC}

 - ±2 mA @ 1.1V V_{CC}
 - ±0.1 mA @ 0.9V V_{CC}
- Uses patented Quiet Series[™] noise/EMI reduction
- Ultra small MicroPak™ leadfree package
- Ultra low dynamic power

Ordering Code:

Order Number	Package Number	Product Code Top Mark	Package Description	Supplied As
NC7SV38P5X	MAA05A		5-Lead SC70, EIAJ SC-88a, 1.25mm Wide	3k Units on Tape and Reel
NC7SV38L6X	MAC06A	G9	6-Lead MicroPak, 1.0mm Wide	5k Units on Tape and Reel

Battery Life vs. V_{CC} Supply Voltage



TinyLogic ULP and ULP-A with up to 50% less power consumption can extend your battery life significantly

Battery Life = $(V_{battery} *I_{battery} *.9)/(P_{device})/24hrs/day$

Where, $P_{device} = (I_{CC} * V_{CC}) + (C_{PD} + C_L) * V_{CC}^2 * f$

Assumes ideal 3.6V Lithium Ion battery with current rating of 900mAH and derated 90% and device frequency at 10MHz, with $C_L = 15 \ pF$ load

TinyLogic® is a registered trademark of Fairchild Semiconductor Corporation. MicroPak™ and Quiet Series™ are trademarks of Fairchild Semiconductor Corporation.

Logic Symbol



Pin Descriptions

Pin Names	Description
A, B	Input
Y	Output
NC	No Connect

Function Table


$$Y = \overline{AB}$$

Inp	Output	
Α	В	Y
L	L	*H
L	Н	*H
Н	L	*H
Н	Н	L

H = HIGH Logic Level L = LOW Logic Level *H = HIGH Impedance Output State (Open Drain)


Connection Diagrams

Pin Assignments for SC70



(Top View)

Pad Assignments for MicroPak



(Top Thru View)

±24 mA

±2 mA

Absolute Maximum Ratings(Note 1)

 $\begin{array}{lll} \mbox{Supply Voltage (V_{CC})} & -0.5 \mbox{V to } +4.6 \mbox{V} \\ \mbox{DC Input Voltage (V_{IN})} & -0.5 \mbox{V to } +4.6 \mbox{V} \\ \end{array}$

DC Output Voltage (V_{OUT})
HIGH or LOW State (Note 2) -0.5V t

 $\label{eq:local_$

DC Output Diode Current (I_{OK})

 $\operatorname{DC}\operatorname{V}_{\operatorname{CC}}$ or Ground Current per

Supply Pin (I $_{CC}$ or Ground) \pm 50 mA Storage Temperature Range (T $_{STG}$) -65°C to +150 $^{\circ}\text{C}$

Recommended Operating Conditions (Note 3)

Supply Voltage 0.9V to 3.6VInput Voltage (V_{IN}) 0V to 3.6V

Output Voltage (V_{OUT})

 $V_{CC} = 0.0V$ 0V to 3.6V HIGH or LOW State 0V to V_{CC}

Output Current in I_{OH}/I_{OL} $V_{CC} = 3.0 \text{V to } 3.6 \text{V}$

 $V_{CC} = 1.1V \text{ to } 1.3V$

 $\begin{array}{lll} \mbox{V}_{CC} = 2.3 \mbox{V to } 2.7 \mbox{V} & \pm 18 \mbox{ mA} \\ \mbox{V}_{CC} = 1.65 \mbox{V to } 1.95 \mbox{V} & \pm 6 \mbox{ mA} \\ \mbox{V}_{CC} = 1.4 \mbox{V to } 1.6 \mbox{V} & \pm 4 \mbox{ mA} \\ \end{array}$

 V_{CC} = 0.9V ± 0.1 mA Free Air Operating Temperature (T_A) -40° C to +85°C

Minimum Input Edge Rate (Δt/ΔV)

 $V_{IN} = 0.8V$ to 2.0V, $V_{CC} = 3.0V$ 10 ns/V

Note 1: Absolute Maximum Ratings: are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: \mathbf{I}_{O} Absolute Maximum Rating must be observed.

Note 3: Unused inputs must be held HIGH or LOW. They may not float.

DC Electrical Characteristics

Symbol	Parameter	V _{cc}	T _A = -	+25°C	T _A = -40°0	C to +85°C	Units	Conditions
Symbol	rarameter	(V)	Min	Max	Min			Conditions
V _{IH}	HIGH Level	0.90	0.65 x V _{CC}		0.65 x V _{CC}			
	Input Voltage	$1.10 \le V_{CC} \le 1.30$	0.65 x V _{CC}		0.65 x V _{CC}			
		$1.40 \le V_{CC} \le 1.60$	0.65 x V _{CC}		0.65 x V _{CC}		V	
		$1.65 \le V_{CC} \le 1.95$	0.65 x V _{CC}		0.65 x V _{CC}		\	
		$2.30 \le V_{CC} < 2.70$	1.6		1.6			
		$2.70 \le V_{CC} \le 3.60$	2.0		2.0			
V _{IL}	LOW Level	0.90		0.35 x V _{CC}		0.35 x V _{CC}		
	Input Voltage	1.10 ≤ V _{CC} ≤ 1.30		$0.35 \times V_{\rm CC}$		$0.35 \times V_{\rm CC}$		
		$1.40 \le V_{CC} \le 1.60$		$0.35 \times V_{\rm CC}$		$0.35 \times V_{\rm CC}$	V	
		$1.65 \le V_{CC} \le 1.95$		$0.35 \times V_{CC}$		$0.35 \times V_{\rm CC}$	\ \	
		$2.30 \le V_{CC} < 2.70$		0.7		0.7		
		$2.70 \le V_{CC} \le 3.60$		8.0		8.0		
V _{OL}	LOW Level	0.90		0.1		0.1		
	Output Voltage	$1.10 \le V_{CC} \le 1.30$		0.1		0.1		
		$1.40 \le V_{CC} \le 1.60$		0.2		0.2		I _{OL} = 100 μA
		$1.65 \le V_{CC} \le 1.95$		0.2		0.2		ΙΟΣ = 100 μΑ
		$2.30 \le V_{CC} < 2.70$		0.2		0.2		
		$2.70 \le V_{CC} \le 3.60$		0.2		0.2		
		$1.10 \le V_{CC} \le 1.30$		0.25 x V _{CC}		0.25 x V _{CC}	l _v	I _{OL} = 2 mA
		$1.40 \le V_{CC} \le 1.60$		0.25 x V _{CC}		0.25 x V _{CC}	ľ	I _{OL} = 4 mA
		$1.65 \le V_{CC} \le 1.95$		0.3		0.3		I _{OL} = 6 mA
		$2.30 \le V_{CC} < 2.70$		0.4		0.4		I _{OL} = 12 mA
		$2.70 \le V_{CC} \le 3.60$		0.4		0.4		IOL = 12 IIIA
		$2.30 \le V_{CC} < 2.70$		0.6		0.6		I _{OI} = 18 mA
		$2.70 \leq V_{CC} \leq 3.60$		0.4		0.4		- 10 HIV
		$2.70 \leq V_{CC} \leq 3.60$		0.55		0.55		I _{OL} = 24 mA
I _{IN}	Input Leakage Current	0.90 to 3.60		±0.1		±0.5	μΑ	$0 \le V_I \le 3.6V$

DC Electrical Characteristics (Continued)

Symbol	Parameter	V _{CC} T _A = +25°C		T _A = -40°	C to +85°C	Units	Conditions	
Cymbol	T drameter	(V)	Min	Max	Min	Max	011113	Conditions
I _{OFF}	Power Off Leakage Current	0		0.5		0.5	μА	$0 \le (V_I, V_O) \le 3.6V$
T _{CC}	Quiescent Supply Current	0.90 to 3.60		0.9		0.9	μА	$V_I = V_{CC}$ or GND
		0.90 to 3.60				±0.9	Ι μΑ	$V_{CC} \le V_I \le 3.6V$

AC Electrical Characteristics

Symbol	Parameter	V _{CC}	-	T _A = +25°C		T _A = -40°C to +85°C		Units	Conditions	Figure
Cymbol	- urumeter	(V)	Min	Тур	Max	Min	Max	Omis	Conditions	Number
t _{PZL}	Propagation Delay	0.90		13					C _L = 15 pF,	
t_{PLZ}		0.50		13					$R_U = R_D = 1000\Omega$	
		$1.10 \le V_{CC} \le 1.30$	3.0	6.0	15.0	1.0	18.6		C _L = 15 pF,]
		$1.40 \le V_{CC} \le 1.60$	1.0	3.2	8.7	1.0	9.7	ns	$R_U = R_D = 1000\Omega$	Figures 1, 2
		$1.65 \le V_{CC} \le 1.95$	1.0	2.0	6.0	1.0	6.8		$C_L = 30 \text{ pF},$	1 '
		$2.30 \leq V_{CC} < 2.70$	8.0	1.2	3.6	0.7	4.7		$R_U = R_D = 1000\Omega$	
		$2.70 \leq V_{CC} \leq 3.60$	0.7	1.0	3.3	0.6	4.0			
C _{IN}	Input Capacitance	0		2.0				pF		
C _{OUT}	Output Capacitance	0		6.5				pF		
C _{PD}	Power Dissipation	0.90 to 3.60		8				pF	V _I = 0V or V _{CC}	
	Capacitance	0.30 to 3.00						ы	f = 10 MHz	

AC Loading and Waveforms




FIGURE 1. AC Test Circuit






FIGURE 2. Waveform for Inverting and Non-Inverting Functions

Symbol			V,	cc		
5,50	$3.3V \pm 0.3V$	2.5V ± 0.2V	1.8V ± 0.15V	1.5V ± 0.10V	1.2V ± 0.10V	0.9V
V _{mi}	1.5V	V _{CC} /2	V _{CC} /2	V _{CC} /2	V _{CC} /2	V _{CC} /2
V _X	V _{OL} + 0.3V	V _{OL} + 0.3V	V _{OL} + 0.15V	V _{OL} + 0.1V	V _{OL} + 0.1V	V _{OL} + 0.1V

Tape and Reel Specification TAPE FORMAT for SC70 Package Таре Number Cavity Cover Tape Designator Section Cavities Status Status Leader (Start End) 125 (typ) Sealed Empty P5X 3000 Filled Sealed Carrier Trailer (Hub End) 75 (typ) Empty Sealed TAPE DIMENSIONS inches (millimeters) Ø 0.061±0.002 TYP. [1.55±0.05] Ø 0.079±0.002 TYP. [2.0±0.05] 0.069 [1.75] [4] 3° MAX. B AT TANGENT POINTS SECTION B-B


DIRECTION OF FEED -





Tape and Reel Specification (Continued) TAPE FORMAT for MicroPak Package Tape Number Cavity Cover Tape Designator Section Cavities Status Status Leader (Start End) 125 (typ) Sealed Empty L6X Carrier 5000 Filled Sealed Trailer (Hub End) 75 (typ) Empty Sealed

TAPE DIMENSIONS inches (millimeters)

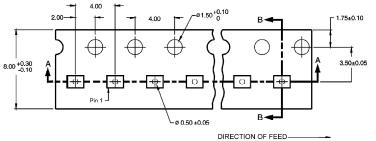


-1.60±0.05




SECTION B-B SCALE:10X

SECTION A-A SCALE:10X

REEL DIMENSIONS inches (millimeters)

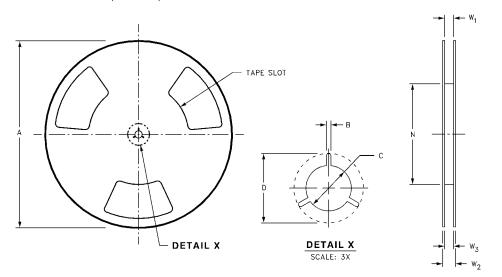


8 mm	Tape Size	A	В	С	D	N	W1	W2	W3
(177.8) (1.50) (13.00) (20.20) (55.00) (8.40 + 1.50/-0.00) (14.40) (W1 + 2.00/-1.00)	9 mm	7.0	0.059	0.512	0.795	2.165	0.331 + 0.059/-0.000	0.567	W1 + 0.078/-0.039
	0 111111	(177.8)	(1.50)	(13.00)	(20.20)	(55.00)	(8.40 + 1.50/–0.00)	(14.40)	(W1 + 2.00/-1.00)

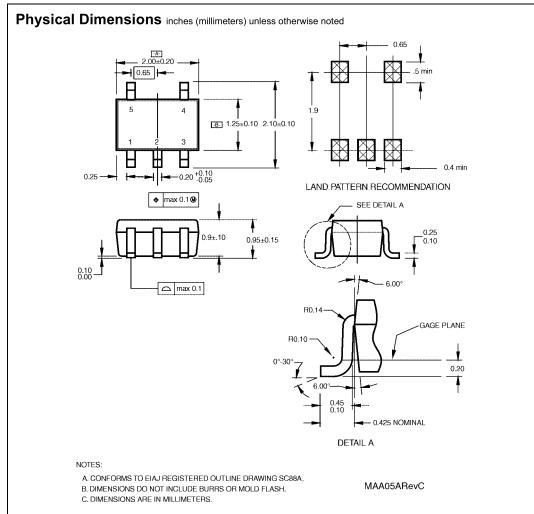

5-Lead SC70, EIAJ SC-88a, 1.25mm Wide Package Number MAA05A

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

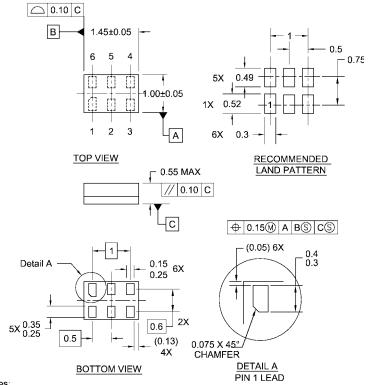

Notes:

- 1. JEDEC PACKAGE REGISTRATION IS ANTICIPATED 2. DIMENSIONS ARE IN MILLIMETERS
- 3. DRAWING CONFORMS TO ASME Y14.5M-1994

MAC06ARevB

6-Lead MicroPak, 1.0mm Wide Package Number MAC06A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- 2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and III) are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free Europe, Middle East and Africa Technical Support:

Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative