

Integrated Load Switch FDC6331L

Description

This device is particularly suited for compact power management in portable electronic equipment where 2.5 V to 8 V input and 2.8 A output current capability are needed. This load switch integrates a small N-Channel power MOSFET (Q1) that drives a large P-Channel power MOSFET (Q2) in one tiny SUPERSOT $^{\text{M}}$ -6 package.

Features

- -2.8 A, -8 V
 - $R_{DS(on)} = 55 \text{ m}\Omega @ V_{GS} = -4.5 \text{ V}$
 - $R_{DS(on)} = 70 \text{ m}\Omega @ V_{GS} = -2.5 \text{ V}$
 - $R_{DS(on)} = 100 \text{ m}\Omega @ V_{GS} = -1.8 \text{ V}$
- Control MOSFET (Q1) Includes Zener Protection for ESD Ruggedness (>6 kV Human Body Model)
- High Performance Trench Technology for Extremely Low R_{DS(on)}
- This is a Pb-Free and Halide Free Device

Applications

- Load Switch
- Power Management

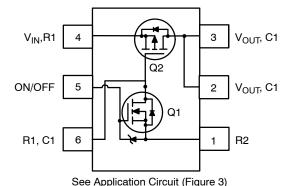


Figure 1.

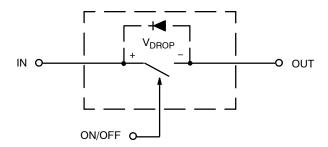


Figure 2. Equivalent Circuit



TSOT-23-6 CASE 419BL

MARKING DIAGRAM



&E = Designates Space

&Y = Binary Calendar Year Coding Scheme

&. = Pin One Dot

331 = Specific Device Code

&G = Date Code

ORDERING INFORMATION

Device	Package	Shipping [†]	
FDC6331L	TSOT-23-6 (Pb-Free)	3000 / Tape & Reel	

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

FDC6331L

ABSOLUTE MAXIMUM RATINGS T_A = 25°C unless otherwise noted

Symbol	Parameter	Value	Unit
V _{IN}	Maximum Input Voltage	±8	V
V _{ON/OFF}	High Level On/Off Voltage Range	-0.5 to 8	V
I _{Load}	Load Current – Continuous (Note 1)	2.8	Α
	Load Current - Pulsed	9	
P _D	Maximum Power Dissipation (Note 1)	0.7	W
T _J , T _{STG}	Operating and Storage Junction Temperature Range	–55 to 150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS $T_A = 25^{\circ}C$ unless otherwise noted

Symbol	Parameter	Value	Unit
$R_{ heta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1)	180	°C/W
$R_{ heta JC}$	Thermal Resistance, Junction-to-Case (Note 1)	60	°C/W

Symbol	Parameter	Test Conditions	Min	Тур	Max	Unit
OFF CHARAC	TERISTICS	•		L.	•	
BV _{IN}	V _{IN} Breakdown Voltage	$V_{ON/OFF} = 0 \text{ V, } I_D = -250 \mu\text{A}$	8	_	_	V
I _{Load}	Zero Gate Voltage Drain Current	V _{IN} = 6.4 V, V _{ON/OFF} = 0 V	-	-	-1	μΑ
I _{FL}	Leakage Current, Forward	V _{ON/OFF} = 0 V, V _{IN} = 8 V	-	-	-100	nA
I _{RL}	Leakage Current, Reverse	V _{ON/OFF} = 0 V, V _{IN} = -8 V	_	-	100	nA
ON CHARACT	ERISTICS (Note 2)					
V _{ON/OFF(th)}	Gate Threshold Voltage	$V_{IN} = V_{ON/OFF}$, $I_D = -250 \mu A$	0.4	0.9	1.5	V
R _{DS(on)}	Static Drain-Source On-Resistance (Q2)	$V_{GS} = -4.5 \text{ V}, I_D = -2.8 \text{ A}$	-	34	55	mΩ
		$V_{GS} = -2.5 \text{ V}, I_D = -2.5 \text{ A}$	-	45	70	
		$V_{GS} = -1.8 \text{ V}, I_D = -2.0 \text{ A}$	-	64	100	
R _{DS(on)}	Static Drain-Source On-Resistance (Q1)	V _{GS} = 4.5 V, I _D = 0.4 A	-	3.1	4	Ω
		$V_{GS} = 2.7 \text{ V}, I_D = 0.2 \text{ A}$	-	3.8	5	
DRAIN-SOUR	CE DIODE CHARACTERISTICS AND	MAXIMUM RATINGS	•		•	
I _S	Maximum Continuous Drain-Source Diode Forward Current		-	-	-0.6	Α
V_{SD}	Drain-Source Diode Forward	V _{ON/OFF} = 0 V, I _S = -0.6 A (Note 2)	-	-	-1.2	V

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

NOTES:

- 1. R_{6JA} is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. $R_{\theta JC}$ is guaranteed by design while $R_{\theta JA}$ is determined by the user's board design.
- 2. Pulse Test: Pulse Width < 300 μs, Duty Cycle < 2.0%.

Voltage

FDC6331L

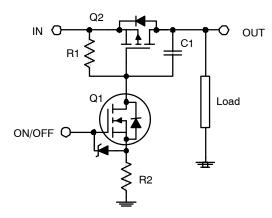


Figure 3. FDC6331L Load Switch Application Circuit

External Component Recommendation:

For additional in-rush current control, R2 and C1 can be added. For more information, see application note AN1030.

TYPICAL CHARACTERISTICS

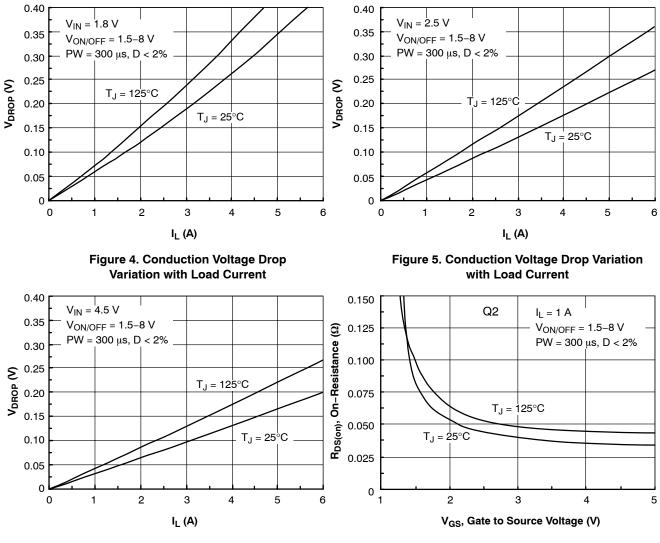


Figure 6. Conduction Voltage Drop Variation with Load Current

Figure 7. On-Resistance Variation with Input Voltage

FDC6331L

TYPICAL CHARACTERISTICS (continued)

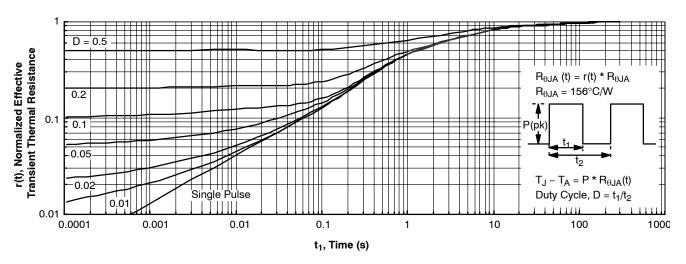


Figure 8. Transient Thermal Response Curve

NOTE: Thermal characterization performed on the conditions described in Note 2.


Transient thermal response will change depends on the circuit board design.


SUPERSOT is a trademark of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries.





TSOT23 6-Lead CASE 419BL **ISSUE A**

DATE 31 AUG 2020

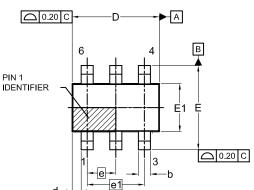

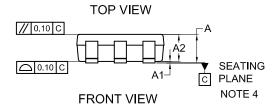





SIDE VIEW

SYMM €
0.95
1.00 MIN
2.60
l l-0.70 M I N

LAND PATTERN RECOMMENDATION

*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.



- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
- CONTROLLING DIMENSION: MILLIMETERS
 DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH,
 PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.25MM PER END. DIMENSIONS D AND E1 ARE DETERMINED AT DATUM H.
- 4. SEATING PLANE IS DEFINED BY THE TERMINALS. "A1" IS DEFINED AS THE DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.

ОΙΜ	MILLIMETERS			
Divi	MIN.	NOM.	MAX.	
Α	0.90	1.00	1.10	
A1	0.00	0.05	0.10	
A2	0.70	0.85	1.00	
А3	0.25 BSC			
b	0.25	0.38	0.50	
С	0.10	0.18	0.26	
D	2.80	2.95	3.10	
d	0.30 REF			
Е	2.50	2.75	3.00	
E1	1.30	1.50	1.70	
е	0.95 BSC			
e1	1.90 BSC			
L1	0.60 REF			
L2	0.20	0.40	0.60	
θ	0°	-	10°	

GENERIC MARKING DIAGRAM*



XXX = Specific Device Code

= Date Code Μ

= Pb-Free Package

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON83292G	Electronic versions are uncontrolled except when accessed directly from the Document Repository Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	TSOT23 6-Lead		PAGE 1 OF 1	

ON Semiconductor and un are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer pu

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative