Quad 2-Channel Multiplexer

The MC74VHC157 is an advanced high-speed CMOS quad 2-channel multiplexer, fabricated with silicon gate CMOS technology. It achieves high-speed operation similar to equivalent Bipolar-Schottky TTL, while maintaining CMOS low-power dissipation.

It consists of four 2-input digital multiplexers with common select (S) and enable (\overline{E}) inputs. When \overline{E} is held High, selection of data is inhibited and all the outputs go Low.

The select decoding determines whether the A or B inputs get routed to the corresponding Y outputs.

The internal circuit is composed of three stages, including a buffer output which provides high noise immunity and stable output. The inputs tolerate voltages up to 7 V, allowing the interface of 5 V systems to 3 V systems.

- High Speed: $t_{PD} = 4.1 \text{ ns} (Typ) \text{ at } V_{CC} = 5 \text{ V}$
- Low Power Dissipation: $I_{CC} = 4 \mu A$ (Max) at $T_A = 25^{\circ}C$
- High Noise Immunity: $V_{NIH} = V_{NIL} = 28\% V_{CC}$
- Power Down Protection Provided on Inputs
- Balanced Propagation Delays
- Designed for 2 V to 5.5 V Operating Range
- Low Noise: V_{OLP} = 0.8 V (Max)
- Pin and Function Compatible with Other Standard Logic Families
- Latchup Performance Exceeds 300 mA
- ESD Performance: HBM > 2000 V; Machine Model > 200 V
- Chip Complexity: 82 FETs
- These Devices are Pb-Free and are RoHS Compliant


s[1 ●	16] v _{cc}
A0 [2	15] Ē
во [3	14] A3
Y0 [4	13] вз
A1 [5	12] Y3
В1 [6	11] A2
Y1 [7	10	B2
GND [8	9] Y2

Figure 1. Pin Assignment




ON Semiconductor

http://onsemi.com



TSSOP-16 DT SUFFIX

CASE 948F




 $\begin{array}{lll} VHC157 = Specific Device Code \\ A & = Assembly Location \\ WL, L & = Wafer Lot \\ Y & = Year \\ WW, W & = Work Week \end{array}$


G or • = Pb-Free Package

ORDERING INFORMATION

Device	Package	Shipping
MC74VHC157DR2G	SOIC-16	2500 Units/Reel
MC74VHC157DTR2G	TSSOP-16	2500 Units/Reel

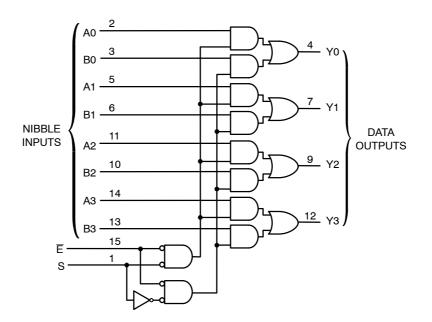







FUNCTION TABLE

Inp	outs	Outputs
Ē	s	Y0 – Y3
н	Х	L
L	L	A0-A3
L	Н	B0-B3

A0 - A3, B0 - B3 = the levels of the respective Data–Word Inputs.

MAXIMUM RATINGS (Note 1)

Symbol	Para	meter	Value	Unit
V _{CC}	DC Supply Voltage		-0.5 to +7.0	V
VI	DC Input Voltage		-0.5 to V_{CC} +7.0	V
Vo	DC Output Voltage		-0.5 to V_{CC} +7.0	V
I _{IK}	DC Input Diode Current	V _I < GND	-20	mA
I _{OK}	DC Output Diode Current	V _O < GND	±20	mA
Ι _Ο	DC Output Sink Current		±25	mA
I _{CC}	DC Supply Current per Supply Pin		±100	mA
T _{STG}	Storage Temperature Range		-65 to +150	°C
TL	Lead Temperature, 1 mm from Case for 1	0 Seconds	260	°C
TJ	Junction Temperature under Bias		+ 150	°C
θ_{JA}	Thermal Resistance		250	°C/W
PD	Power Dissipation in Still Air at 85°C		250	mW
MSL	Moisture Sensitivity		Level 1	
F _R	Flammability Rating	Oxygen Index: 30% – 35%	UL-94-VO (0.125 in)	
V _{ESD}	ESD Withstand Voltage	>2000 >200 N/A	V	
I _{Latch-Up}	Latch-Up Performance Ab	ove V _{CC} and Below GND at 85 $^{\circ}$ C (Note 5)	±500	mA

1. Absolute maximum continuous ratings are those values beyond which damage to the device may occur. Extended exposure to these conditions or conditions beyond those indicated may adversely affect device reliability. Functional operation under absolute maximum-rated conditions is not implied.

2. Tested to EIA/JESD22–A114–A.

3. Tested to EIA/JESD22-A115-A.

4. Tested to JESD22-C101-A.

5. Tested to EIA/JESD78.

RECOMMENDED OPERATING CONDITIONS

Symbol	Characteristics	Min	Max	Unit
V _{CC}	DC Supply Voltage	2.0	5.5	V
V _{IN}	DC Input Voltage (Note 6)	0	5.5	V
V _{OUT}	DC Output Voltage	0	V _{CC}	V
T _A	Operating Temperature Range, all Package Types	- 55	125	°C
t _r , t _f	Input Rise or Fall Time $ \begin{array}{c} V_{CC} = 3.3 \ V \ \pm \ 0.3 \ V \\ V_{CC} = 5.0 \ V \ \pm \ 0.5 \ V \end{array} $	0 0	100 20	ns/V

6. Unused inputs may not be left open. All inputs must be tied to a high-logic voltage level or a low-logic input voltage level.

DEVICE JUNCTION TEMPERATURE VERSUS TIME TO 0.1% BOND FAILURES

Junction Temperature °C	Time, Hours	Time, Years
80	1,032,200	117.8
90	419,300	47.9
100	178,700	20.4
110	79,600	9.4
120	37,000	4.2
130	17,800	2.0
140	8,900	1.0

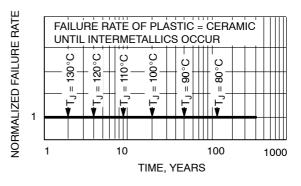


Figure 4. Failure Rate vs. Time Junction Temperature

		V _{CC}	т	A = 25°0	0	T _A ≤	85°C	–55°C ≤T	A≤125°C	
Parameter	Condition	(V)	Min	Тур	Max	Min	Max	Min	Max	Unit
High-Level Input Voltage		2.0 3.0 to 5.5	1.5 0.7 V _{CC}			1.5 0.7 V _{CC}		1.5 0.7 V _{CC}		V
Low-Level Input Voltage		2.0 3.0 to 5.5			0.5 0.3 V _{CC}		0.5 0.3 V _{CC}		0.5 0.3 V _{CC}	V
High-Level Output Voltage	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $I_{OH} = -50 \ \mu\text{A}$	2.0 3.0 4.5	1.9 2.9 4.4	2.0 3.0 4.5		1.9 2.9 4.4		1.9 2.9 4.4		V
	$\label{eq:VIN} \begin{array}{l} V_{IN} = V_{IH} \text{ or } V_{IL} \\ I_{OH} = -4 \text{ mA} \\ I_{OH} = -8 \text{ mA} \end{array}$	3.0 4.5	2.58 3.94			2.48 3.8		2.34 3.66		
Low-Level Output Voltage	$V_{IN} = V_{IH} \text{ or } V_{IL}$ $I_{OL} = 50 \ \mu\text{A}$	2.0 3.0 4.5		0.0 0.0 0.0	0.1 0.1 0.1		0.1 0.1 0.1		0.1 0.1 0.1	V
	$\label{eq:VIN} \begin{array}{l} V_{IN} = V_{IH} \text{ or } V_{IL} \\ I_{OH} = 4 \text{ mA} \\ I_{OH} = 8 \text{ mA} \end{array}$	3.0 4.5			0.36 0.36		0.44 0.44		0.52 0.52	
Input Leakage Current	V _{IN} = 5.5 V or GND	0 to 5.5			±0.1		±1.0		±1.0	μA
Quiescent Supply Current	V _{IN} = V _{CC} or GND	5.5			4.0		40.0		40.0	μA
	High-Level Input Voltage Low-Level Input Voltage High-Level Output Voltage Low-Level Output Voltage Input Leakage Current Quiescent	$\begin{array}{c c} \mbox{High-Level} \\ \mbox{Input Voltage} \\ \mbox{Low-Level} \\ \mbox{Input Voltage} \\ \mbox{High-Level} \\ \mbox{Output Voltage} \\ \hline \mbox{V}_{IN} = V_{IH} \mbox{ or } V_{IL} \\ \mbox{I}_{OH} = -4 \mbox{ mA} \\ \mbox{I}_{OH} = -4 \mbox{ mA} \\ \mbox{I}_{OH} = -8 \mbox{ mA} \\ \hline \mbox{V}_{IN} = V_{IH} \mbox{ or } V_{IL} \\ \mbox{I}_{OH} = -8 \mbox{ mA} \\ \hline \mbox{V}_{IN} = V_{IH} \mbox{ or } V_{IL} \\ \mbox{I}_{OH} = 50 \mbox{ \muA} \\ \hline \mbox{V}_{IN} = V_{IH} \mbox{ or } V_{IL} \\ \mbox{I}_{OH} = 4 \mbox{ mA} \\ \mbox{I}_{OH} = 8 \mbox{ mA} \\ \hline \mbox{Input Leakage} \\ \mbox{Quiescent} \\ \hline \mbox{V}_{IN} = V_{CC} \mbox{ or } \end{array}$	$\begin{array}{ c c c } \hline Parameter & Condition & (V) \\ \hline High-Level \\ Input Voltage & 2.0 \\ 3.0 to 5.5 \\ \hline Low-Level \\ Input Voltage & 2.0 \\ 3.0 to 5.5 \\ \hline High-Level \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ \hline V_{IN} = -50 \ \mu\text{A} & 3.0 \\ I_{OH} = -4 \ \text{mA} \\ I_{OH} = -4 \ \text{mA} & 3.0 \\ I_{OH} = -8 \ \text{mA} & 4.5 \\ \hline \\ Low-Level \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = S.5 \ \text{V} \text{ or } 4.5 \\ \hline \\ Input Leakage \\ Current & V_{IN} = V_{CC} \text{ or } 5.5 \\ \hline \end{array}$	$\begin{array}{ c c c c } \hline Parameter & Condition & (V) & Min \\ \hline High-Level \\ Input Voltage & 2.0 \\ 3.0 to 5.5 & 0.7 V_{CC} \\ \hline Low-Level \\ Input Voltage & 2.0 \\ 3.0 to 5.5 & 0.7 V_{CC} \\ \hline High-Level \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ \hline V_{IN} = V_{IH} \text{ or } V_{IL} \\ I_{OH} = -4 \text{ mA} \\ I_{OH} = -8 \text{ mA} & 3.0 \\ 4.5 & 3.94 \\ \hline \\ Low-Level \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} \\ Output Voltage & V_{IN} = 5.5 \text{ V or} \\ Output Leakage \\ Current & V_{IN} = V_{CC} \text{ or } & 5.5 \\ \hline \end{array}$	$\begin{array}{c c c c c c c c c c c c c c c c c c c $	$\begin{array}{ c c c c c c } \hline Parameter & Condition & (V) & Min & Typ & Max \\ \hline High-Level \\ Input Voltage & 2.0 & 1.5 & 0.7 V_{CC} & 0.5 \\ \hline Low-Level \\ Input Voltage & 2.0 & 0.05 & 0.3 V_{CC} & 0.5 \\ \hline High-Level \\ Output Voltage & V_{IN} = V_{IH} \text{ or } V_{IL} & 2.0 & 1.9 & 2.0 & 0.5 \\ \hline U_{IOH} = -50 \mu A & 3.0 & 2.9 & 3.0 & 4.5 & 4.4 & 4.5 & 0.5 \\ \hline V_{IN} = V_{IH} \text{ or } V_{IL} & 3.0 & 2.58 & 3.94 & 0.5 & 0.1 & 0.5 & 0.1 & 0.5 & 0.1 & 0.5 & 0.3 V_{CC} & 0.0 & 0.1 & 0.1 & 0.0 & 0.1 & 0.0 & 0.1 & 0.1 & 0.0 & 0.1 & 0.1 & 0.0 & 0.1 & 0.1 & 0.1 & 0.0 & 0.1 & 0.1 & 0.1 & 0.0 & 0.1 $	$\begin{array}{c c c c c c c c c c c c c c c c c c c $	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$

DC CHARACTERISTICS (Voltages Referenced to GND)


AC ELECTRICAL CHARACTERISTICS (Input $t_r = t_f = 3.0 \text{ ns}$)

					T _A = 25°	°C	T _A ≤	85°C	–55°C ≤1	Γ _A ≤125°C	
Symbol	Characteristic	Test Condit	ions	Min	Тур	Max	Тур	Max	Тур	Max	Unit
t _{PLH} , t _{PHL}	Propagation Delay, A to B to Y	V_{CC} = 3.3 ± 0.3 V	C _L = 15 pF C _L = 50 pF		6.2 8.7	9.7 13.2	1.0 1.0	11.5 15.0	1.0 1.0	11.5 15.0	ns
		V_{CC} = 5.0 ± 0.5 V	C _L = 15 pF C _L = 50 pF		4.1 5.6	6.4 8.4	1.0 1.0	7.5 9.5	1.0 1.0	7.5 9.5	
t _{PLH} , t _{PHL}	Propagation Delay, S to Y	V_{CC} = 3.3 ± 0.3 V	C _L = 15 pF C _L = 50 pF		8.4 10.9	13.2 16.7	1.0 1.0	15.5 19.0	1.0 1.0	15.5 19.0	ns
		V_{CC} = 5.0 ± 0.5 V	C _L = 15 pF C _L = 50 pF		5.3 6.8	8.1 10.1	1.0 1.0	9.5 11.5	1.0 1.0	9.5 11.5	
t _{PLH} , t _{PHL}	Propagation Delay, E to Y	V_{CC} = 3.3 ± 0.3 V	C _L = 15 pF C _L = 50 pF		8.7 11.2	13.6 17.1	1.0 1.0	16.0 19.5	1.0 1.0	16.0 19.5	ns
		V_{CC} = 5.0 ± 0.5 V	C _L = 15 pF C _L = 50 pF		5.6 7.1	8.6 10.6	1.0 1.0	10.0 12.0	1.0 1.0	10.0 12.0	
C _{IN}	Input Capacitance				4	10		10		10	pF
							Туріса	l @ 25°C	C, V _{CC} = 5.0	v	
C _{PD}	Power Dissipation C	apacitance (Note 7)						20)		pF

7. C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation: $I_{CC(OPR)} = C_{PD} \bullet V_{CC} \bullet f_{in} + I_{CC}$. C_{PD} is used to determine the no–load dynamic power consumption: $P_D = C_{PD} \bullet V_{CC}^2 \bullet f_{in} + I_{CC} \bullet V_{CC}$.

NOISE CHARACTERISTICS (Input $t_r = t_f = 3.0 \text{ ns}$; $C_L = 50 \text{ pF}$; $V_{CC} = 5.0 \text{ V}$)

		$T_A = 25^{\circ}C$		
Symbol	Characteristic	Тур	Мах	Unit
V _{OLP}	Quiet Output Maximum Dynamic V _{OL}	0.3	0.8	V
V _{OLV}	Quiet Output Minimum Dynamic V _{OL}	-0.3	-0.8	V
V _{IHD}	Minimum High Level Dynamic Input Voltage		3.5	V
V _{ILD}	Maximum Low Level Dynamic Input Voltage		1.5	V

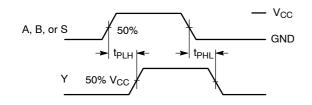


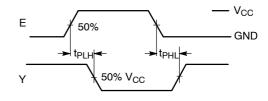




Figure 6. Inverting Switching



*Includes all probe and jig capacitance.



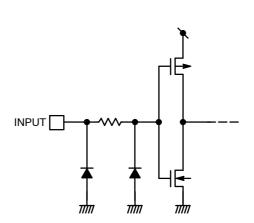


Figure 8. Input Equivalent Circuit






DIMENSIONS: MILLIMETERS

DOCUMENT NUMBER:	98ASB42566B	Electronic versions are uncontrolled except when accessed directly from the Document Repository Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.					
DESCRIPTION:	SOIC-16		PAGE 1 OF 1				
ON Semiconductor and user trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding							

ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.



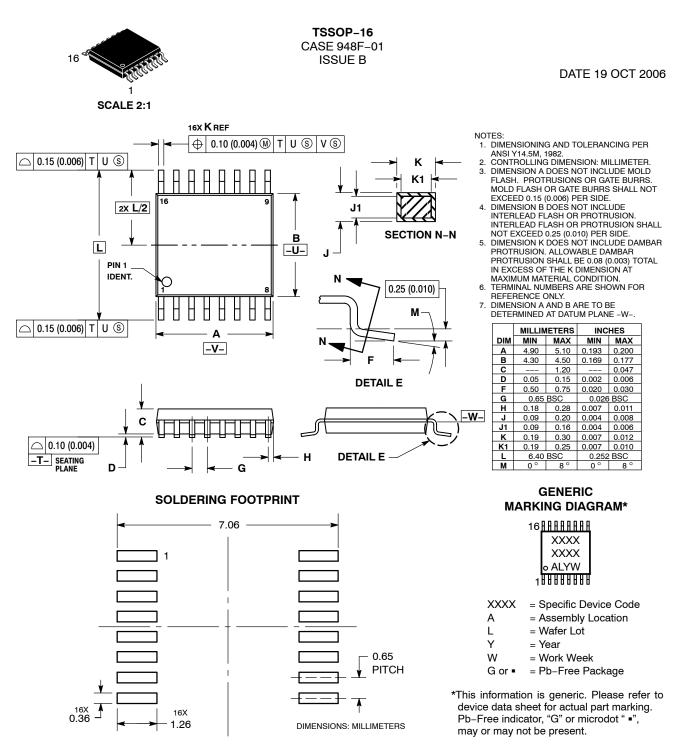

DOCUMENT NUMBER:	98ASH70247A	Electronic versions are uncontrolled except when accessed directly from Printed versions are uncontrolled except when stamped "CONTROLLED				
DESCRIPTION:	TSSOP-16	-	PAGE 1 OF 1			
ON Semiconductor and 🕡 are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries.						

ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and calcular performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems. or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

TECHNICAL SUPPORT

onsemi Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative